
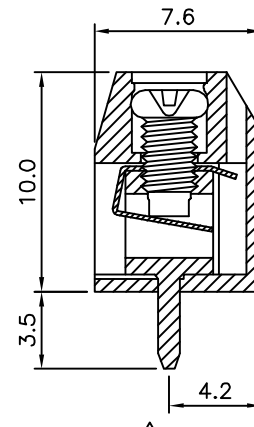
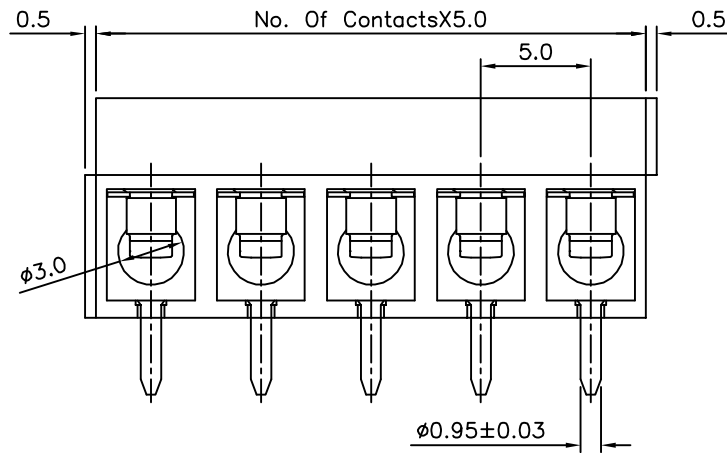


Recommended P.C.B. Layout

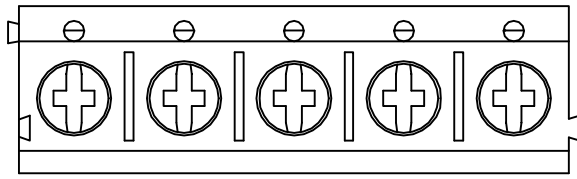

△ SPECIFICATION

Voltage Rating:250V AC
 Current Rating:15 Amps/Way Max.
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms/1000V
 Withstanding Voltage:1500V AC(1Minute),Test Time=60 Sec/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature:260°C±10°C
 10 Seconds Max.

Torque:4.0 kgf.cm/M2.6
 Wire Range:14~24 AWG
 Contact(Metal Housing):Copper Alloy
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 Wire Guard:Stainless Steel
 Surface Of Solder Tail:Tin Plated

△ Insulator:Polyamide+G.F.(UL94V-0),Blue
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19866

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°


SCALE

NONE

REV.

A2

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/07/2011
△ A1		Modify Data	HZF	10/13/2010
△ A0		NEW RELEASE	HZF	04/13/2009