
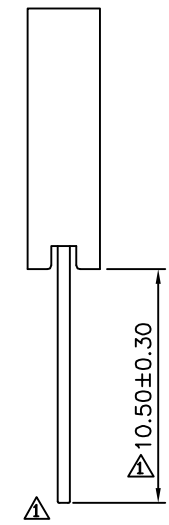
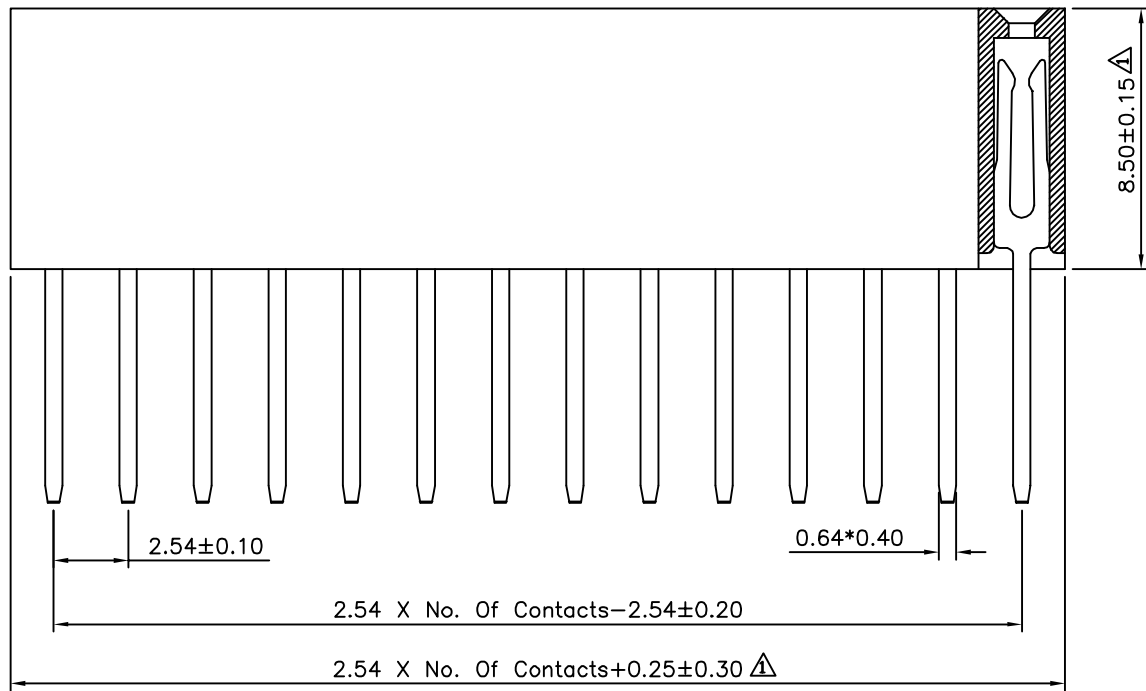


△ Recommended P.C.B. Layout (Top Side)  
(PCB Board Tolerance ±0.05)

**△ SPECIFICATION**  
 Current Rating: 3.0 Amp  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Withstand Voltage: 1000V AC/DC  
 Operation Temperature: -40°C To +105°C  
 Contact: Brass, Gold Plated Over Nickel  
 Insulator: PBT+30%G.F.(UL94V-0), Black  
 RoHS Compliant

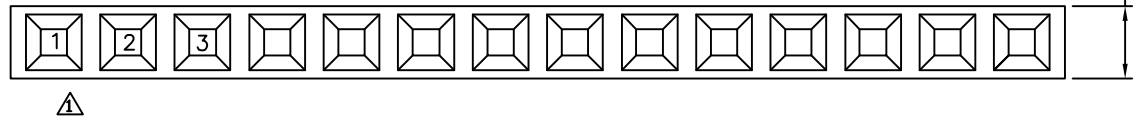

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
18689		MEI		
		CHECKED BY HZF		
		DRAWING BY PEGA		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	04/02/2010
△ A0		NEW RELEASE	HZF	02/08/2007